


Specifications

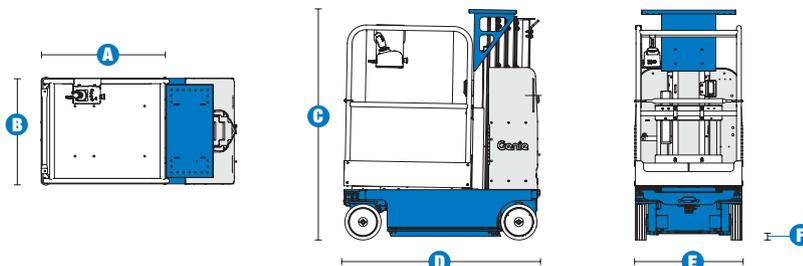

| MODELS | GR™-12 | | GR™-15 | | GR™-20 | |
|---|---------------|-------------|---------------|-------------|---------------|-------------|
| MEASUREMENTS | US | Metric | US | Metric | US | Metric |
| Working height* | 17 ft 5 in | 5.48 m | 20 ft 8 in | 6.47 m | 25 ft 11 in | 8.07 m |
| Platform height | 11 ft 5 in | 3.48 m | 14 ft 8 in | 4.47 m | 19 ft 11 in | 6.07 m |
| A B Platform dimensions (length x width) | | | | | | |
| Standard | 35 x 29.5 in | .89 x .75 m | 35 x 29.5 in | .89 x .75 m | 35 x 29.5 in | .89 x .75 m |
| Standard with extension | 55 x 29.5 in | 1.4 x .75 m | 55 x 29.5 in | 1.4 x .75 m | 55 x 29.5 in | 1.4 x .75 m |
| Stock picker | 35 x 28.75 in | .89 x .73 m | 35 x 28.75 in | .89 x .73 m | 35 x 28.75 in | .89 x .73 m |
| Stock picker w/adjustable tray | 56 x 28.75 in | 1.4 x .73 m | 56 x 28.75 in | 1.4 x .73 m | 56 x 28.75 in | 1.4 x .73 m |
| Standard AWP**** | 27 x 26 in | .69 x .66 m | 27 x 26 in | .69 x .66 m | 27 x 26 in | .69 x .66 m |
| Narrow AWP**** | 26 x 20 in | .66 x .51 m | 26 x 20 in | .66 x .51 m | 26 x 20 in | .66 x .51 m |
| C Height - stowed | 5 ft 2 in | 1.57 m | 5 ft 2 in | 1.57 m | 6 ft 6 in | 1.98 m |
| D Length - stowed | 4 ft 5 in | 1.35 m | 4 ft 5 in | 1.35 m | 4 ft 5 in | 1.35 m |
| E Width | 2 ft 5.5 in | .75 m | 2 ft 5.5 in | .75 m | 2 ft 7.5 in | .80 m |
| F Ground clearance - center | 2.5 in | .06 m | 2.5 in | .06 m | 2.5 in | .06 m |

| PRODUCTIVITY | | | | | | |
|--------------------------------|---------------------|----------------|---------------------|----------------|---------------------|----------------|
| Lift capacity | 500 lbs | 227 kg | 500 lbs | 227 kg | 350 lbs | 159 kg |
| Lift capacity - extension deck | 250 lbs | 113 kg | 250 lbs | 113 kg | 250 lbs | 113 kg |
| Drive speed - stowed | 2.5 mph | 4.0 km/h | 2.5 mph | 4.0 km/h | 2.5 mph | 4.0 km/h |
| Drive speed - raised | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h |
| Gradeability** | 30% | | 30% | | 30% | |
| Turning radius - inside | zero | | zero | | zero | |
| - outside | 4 ft 7 in | 1.42 m | 4 ft 7 in | 1.42 m | 4 ft 7 in | 1.42 m |
| Raise / lower speed | 20 / 18 sec | 20 / 18 sec | 21 / 19 sec | 21 / 19 sec | 24 / 21 sec | 24 / 21 sec |
| Controls | 24V DC proportional | | 24V DC proportional | | 24V DC proportional | |
| Tires - solid non-marking | 10 x 3 x 8 in | 25 x 8 x 20 cm | 10 x 3 x 8 in | 25 x 8 x 20 cm | 10 x 3 x 8 in | 25 x 8 x 20 cm |

| POWER | | | | | | |
|---------------------------|--------------------------------|--------|--------------------------------|--------|--------------------------------|--------|
| Power source | 24V (four 6V 225 Ah batteries) | | 24V (four 6V 225 Ah batteries) | | 24V (four 6V 225 Ah batteries) | |
| Hydraulic system capacity | 2.2 gal | 8.33 L | 2.2 gal | 8.33 L | 2.2 gal | 8.33 L |

| WEIGHT*** | | | | | | |
|-----------|-----------|--------|-----------|--------|-----------|----------|
| | 1,581 lbs | 717 kg | 2,192 lbs | 994 kg | 2,451 lbs | 1,112 kg |

| STANDARDS COMPLIANCE | ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10 |
|----------------------|---|
|----------------------|---|

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.

** Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

*** Weight will vary depending on options and/or country standards.

**** Not available for CE

Features

EASILY CONFIGURED TO MEET YOUR NEEDS

PLATFORM OPTIONS

- Standard platform with gate and sliding midrail
- Extension platform with sliding midrail
- Extension platform with gate
- Stockpicker platform with dual side entry gates and adjustable tray
- Standard AWP platform with sliding midrail*
- Standard AWP platform with gate*
- Narrow AWP platform with gate*

POWER

- 24V (four 6V 225 Ah batteries)

TIRE

- Non-marking solid tires

STANDARD FEATURES

MEASUREMENTS

GR™-12

- 17 ft 5 in (5.48 m) working height
- 11 ft 5 in (3.48 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-15

- 20 ft 8 in (6.47 m) working height
- 14 ft 8 in (4.47 m) platform height
- Up to 500 lb (227 kg) lift capacity

GR™-20

- 25 ft 11 in (8.07 m) working height
- 19 ft 11 in (6.07 m) platform height
- Up to 350 lb (159 kg) lift capacity

PRODUCTIVITY

- Standard platform with sliding midrail
- Auxiliary platform lowering
- Low 15 in (.38 m) platform entry height
- Patented rigid mast system
- Compact base 29.5 x 53 in (.75 m x 1.35 m) (GR-12, GR-15 only)
- Ground clearance 2.5 inches (stowed)
- Fully proportional lift and drive controls
- Onboard diagnostic system
- AC power to platform
- Descent and tilt alarm
- Zero inside turning radius
- Dual wheel brakes
- Hydraulic brake release
- Pothole protection
- Hinged rear covers for easy access to all major electrical and hydraulic components
- Tie down attachment points
- Large forklift pockets access
- Non-marking solid tires

POWER

- Automatic 25 amp battery charger



OPTIONS & ACCESSORIES

PRODUCTIVITY

- Extension platform with sliding midrail
- Extension platform with gate
- Stockpicker platform with dual side entry gates and adjustable tray
- Standard AWP platform with sliding midrail*
- Standard AWP platform with gate*
- Narrow AWP platform with gate*
- Work station tray (GR-12, GR-15 only)
- Stock picker rear parcel tray (GR-12 and -15)
- Stock picker bike rack
- Dual flashing beacons
- Motion alarm
- Fluorescent tube caddy
- Automotive horn

POWER

- 800 watt inverter (120-230V AC/50-60 Hz)
- Maintenance-free batteries

*Not available for CE

Genie United States

18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730

Telephone **(425) 881-1800**
Toll Free in USA/Canada **800-536-1800**
Fax (425) 883-3475

Genie Europe

The Maltings
Wharf Road
Grantham NG31 6BH
U.K.

Telephone **+44 (0)1476 584333**
Fax +44 (0)1476 584334

Email: infoeurope@genieind.com

Distributed By:

Effective Date: July, 2007. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex® is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie® is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. Copyright © 2007 Terex Corporation.

GR 6K 0707G. Part No. 109312

www.genieindustries.com